

LM2902-Q1, LM2902B-Q1, and LM2902BA-Q1 Industry-Standard Quad Operational Amplifiers for Automotive Applications

1 Features

- AEC Q-100 qualified for automotive applications
 - Temperature grade 1: –40°C to +125°C
 - Device HBM ESD classification 2
 - Device CDM ESD classification C5
- Wide supply range of:
 - 3 V to 36 V (LM2902B-Q1 and LM2902BA-Q1)
 - 3 V to 32 V (LM2902KV and LM2902KAV)
 - 3 V to 26 V (all other products)
- Input offset voltage maximum at 25°C of:
 - 2 mV (LM2902BA-Q1 and LM2902KAV)
 - 3 mV (LM2902B-Q1)
 - 7 mV (all other products)
- Internal RF and EMI filter (LM2902B-Q1 and LM2902BA-Q1)
- Supply-current of 175 µA per channel, typical
- Unity-gain bandwidth of 1.2 MHz
- Common-mode input voltage range includes V–
- Differential input voltage range equal to maximum-rated supply voltage

2 Applications

- [Automotive lighting](#)
- [Body electronics](#)
- [Automotive head unit](#)
- [Telematics control unit](#)
- [Emergency call \(eCall\)](#)
- [Passive safety: brake system](#)
- Electric vehicle / hybrid electric:
 - [Inverter and motor control](#)
 - [On-board \(OBC\) and wireless charger](#)
 - [Battery management system \(BMS\)](#)

3 Description


The LM2902-Q1, LM2902B-Q1, and LM2902BA-Q1 are industry-standard operational amplifiers that have been qualified for automotive use in accordance to the AEC-Q100 specifications. The LM2902B-Q1 and LM2902BA-Q1 are the next-generation versions of the LM2902-Q1, which include four high-voltage (36 V) operational amplifiers (op amps). The LM2902B-Q1 and LM2902BA-Q1 provide outstanding value for cost-sensitive applications, with features including low offset (3 mV and 2 mV maximum, respectively), common-mode input range to ground, and high differential input voltage capability.

The LM2902B-Q1 and LM2902BA-Q1 simplify circuit design with enhanced features such as unity-gain stability, lower offset voltage of 0.3 mV (typical), and lower quiescent current of 240 µA (typical). High ESD (2 kV, HBM) and integrated EMI and RF filters enable the LM2902B-Q1 and LM2902BA-Q1 devices to be used in the most rugged, environmentally challenging applications for the automotive marketplace.

Device Information

| PART NUMBER ⁽¹⁾ | CHANNEL COUNT | PACKAGE | PACKAGE SIZE |
|----------------------------|---------------|-----------------------------|----------------|
| LM2902B-Q1 | Quad | D (SOIC, 14) ⁽²⁾ | 8.65 mm × 6 mm |
| | | PW (TSSOP, 14) | 5 mm × 6.4 mm |
| LM2902BA-Q1 | | D (SOIC, 14) ⁽²⁾ | 8.65 mm × 6 mm |
| | | PW (TSSOP, 14) | 5 mm × 6.4 mm |
| LM2902-Q1 | | D (SOIC, 14) | 8.65 mm × 6 mm |
| | | PW (TSSOP, 14) | 5 mm × 6.4 mm |

- (1) For all available packages, see the orderable addendum at the end of the data sheet.
 (2) This product is preview only.

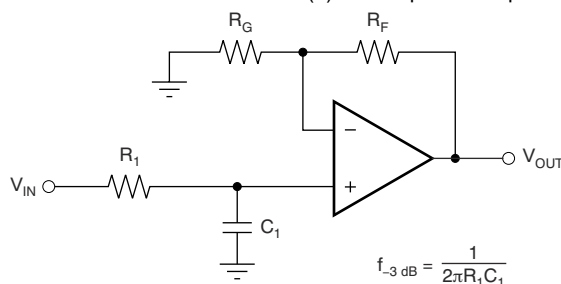

$$\frac{V_{OUT}}{V_{IN}} = \left(1 + \frac{R_F}{R_G}\right) \left(\frac{1}{1 + sR_1C_1}\right)$$

Single-Pole, Low-Pass Filter



Table of Contents

| | | | |
|--|-----------|--|-----------|
| 1 Features | 1 | 8.1 Overview..... | 17 |
| 2 Applications | 1 | 8.2 Functional Block Diagram..... | 17 |
| 3 Description | 1 | 8.3 Feature Description..... | 17 |
| 4 Revision History | 2 | 8.4 Device Functional Modes..... | 18 |
| 5 Pin Configurations and Functions | 4 | 9 Application and Implementation | 19 |
| 6 Specifications | 5 | 9.1 Application Information..... | 19 |
| 6.1 Absolute Maximum Ratings..... | 5 | 9.2 Typical Application..... | 19 |
| 6.2 ESD Ratings..... | 5 | 9.3 Power Supply Recommendations..... | 20 |
| 6.3 Recommended Operating Conditions..... | 5 | 9.4 Layout..... | 20 |
| 6.4 Thermal Information..... | 6 | 10 Device and Documentation Support | 22 |
| 6.5 Electrical Characteristics - LM2902B-Q1 and LM2902BA-Q1..... | 6 | 10.1 Documentation Support..... | 22 |
| 6.6 Electrical Characteristics: LM2902-Q1, LM2902KV-Q1, LM2902KAV-Q1..... | 8 | 10.2 Receiving Notification of Documentation Updates..... | 22 |
| 6.7 Operating Conditions: LM2902-Q1, LM2902KV- Q1, LM2902KAV-Q1..... | 9 | 10.3 Support Resources..... | 22 |
| 6.8 Typical Characteristics..... | 10 | 10.4 Trademarks..... | 22 |
| 7 Parameter Measurement Information | 16 | 10.5 Electrostatic Discharge Caution..... | 22 |
| 8 Detailed Description | 17 | 10.6 Glossary..... | 22 |
| | | 11 Mechanical, Packaging, and Orderable Information | 22 |

4 Revision History

NOTE: Page numbers for previous revisions may differ from page numbers in the current version.


| Changes from Revision G (February 2023) to Revision H (October 2023) | Page |
|--|------|
| • Changed the format of <i>Package Information</i> table to include package lead size and channel count..... | 1 |
| • Changed the status of the LM2902BA-Q1 TSSOP-14 package from: <i>preview</i> to: <i>active</i> | 1 |

| Changes from Revision F (May 2022) to Revision G (February 2023) | Page |
|--|------|
| • Deleted the preview note for the LM2902B-Q1 TSSOP-14 package in the <i>Device Information</i> table..... | 1 |
| • Changed the LM2902B-Q1 values in the <i>Thermal Information</i> section..... | 6 |
| • Added <i>Typical Characteristics</i> curves for LM2902B-Q1 and LM2902BA-Q1..... | 10 |

| Changes from Revision E (April 2008) to Revision F (May 2022) | Page |
|--|------|
| • Changed the name of the data sheet..... | 1 |
| • Revised <i>Features</i> section to include LM2902B-Q1 and LM2902BA-Q1..... | 1 |
| • Added <i>Applications</i> section | 1 |
| • Added LM2902B-Q1 and LM2902BA-Q1 to the <i>Device Information</i> table..... | 1 |
| • Added LM2902B-Q1 and LM2902BA-Q1 to the <i>Description</i> section..... | 1 |
| • Updated <i>Pin Configurations and Functions</i> section to include <i>Pin Functions</i> table..... | 4 |
| • Added LM2902B-Q1 and LM2902BA-Q1 to the <i>Absolute Maximum Ratings</i> table..... | 5 |
| • Added <i>ESD Ratings</i> table with LM2902B-Q1 and LM2902BA-Q1..... | 5 |
| • Added LM2902B-Q1 and LM2902BA-Q1 to <i>Recommended Operating Conditions</i> section..... | 5 |
| • Added LM2902B-Q1 and LM2902BA-Q1 to <i>Thermal Information</i> section..... | 6 |
| • Added <i>Overview</i> section to the data sheet..... | 17 |
| • Added <i>Feature Description</i> section..... | 17 |
| • Added <i>Input Common Mode Range</i> section to <i>Feature Description</i> section..... | 17 |
| • Added <i>Device Functional Modes</i> information for LM2902B-Q1 and LM2902BA-Q1..... | 18 |
| • Added <i>Application and Implementation</i> section for LM2902B-Q1 and LM2902BA-Q1..... | 19 |
| • Added <i>Application Information</i> section for LM2902B-Q1 and LM2902BA-Q1..... | 19 |
| • Added <i>Typical Application</i> section for LM2902B-Q1 and LM2902BA-Q1..... | 19 |
| • Added <i>Power Supply Recommendations</i> section to data sheet..... | 20 |

| | |
|--|----|
| • Added <i>Layout</i> section to data sheet..... | 20 |
| • Added <i>Device and Documentation Support</i> section to data sheet..... | 22 |
| • Added <i>Mechanical, Packaging, and Orderable Information</i> section to data sheet..... | 22 |

5 Pin Configurations and Functions

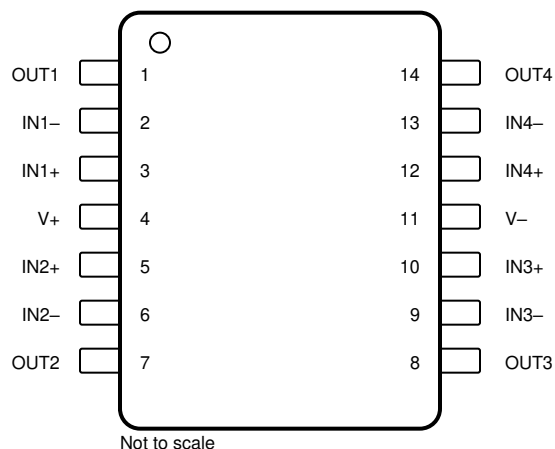

**Figure 5-1. D and PW Package
14-Pin SOIC and TSSOP
(Top View)**

Table 5-1. Pin Functions

| PIN | | I/O | DESCRIPTION |
|------|-----|-----|--|
| NAME | NO. | | |
| IN1– | 2 | I | Inverting input, channel 1 |
| IN1+ | 3 | I | Noninverting input, channel 1 |
| IN2– | 6 | I | Inverting input, channel 2 |
| IN2+ | 5 | I | Noninverting input, channel 2 |
| IN3– | 9 | I | Inverting input, channel 3 |
| IN3+ | 10 | I | Noninverting input, channel 3 |
| IN4– | 13 | I | Inverting input, channel 4 |
| IN4+ | 12 | I | Noninverting input, channel 4 |
| NC | — | — | No internal connection |
| OUT1 | 1 | O | Output, channel 1 |
| OUT2 | 7 | O | Output, channel 2 |
| OUT3 | 8 | O | Output, channel 3 |
| OUT4 | 14 | O | Output, channel 4 |
| V– | 11 | — | Negative (lowest) supply or ground (for single-supply operation) |
| V+ | 4 | — | Positive (highest) supply |

6 Specifications

6.1 Absolute Maximum Ratings

For $T_A = 25^\circ\text{C}$ (unless otherwise noted)⁽¹⁾

| | LM2902B-Q1, LM2902BA-Q1 | LM2902-Q1 | LM2902KV-Q1 | UNIT |
|---|----------------------------|------------|-------------|------------------|
| Supply voltage, V_{CC} ⁽²⁾ | 40 | 26 | 32 | V |
| Differential input voltage, V_{ID} ⁽³⁾ | ± 40 | ± 26 | ± 32 | V |
| Input voltage, V_I | -0.3 to 40 | -0.3 to 26 | -0.3 to 32 | V |
| Duration of output short circuit (one amplifier) to ground at (or below) $T_A = 25^\circ\text{C}$, $V_{CC} \leq 15\text{ V}$ ⁽⁴⁾ | Unlimited | Unlimited | Unlimited | |
| Operating virtual junction temperature, T_J | 150 | 142 | 142 | $^\circ\text{C}$ |
| Storage temperature range, T_{stg} | -65 to 150 | -65 to 150 | -65 to 150 | $^\circ\text{C}$ |

- (1) Stresses beyond those listed under *Absolute Maximum Ratings* may cause permanent damage to the device. These are stress ratings only, which do not imply functional operation of the device at these or any other conditions beyond those indicated under *Recommended Operating Conditions*. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.
- (2) All voltage values are with respect to network ground terminal GND.
- (3) Differential voltages are at IN+ with respect to IN-.
- (4) Short circuits from outputs to V_{CC} can cause excessive heating and eventual destruction.

6.2 ESD Ratings

| | | | VALUE | UNIT |
|------------------------------|-------------------------|---|-------|------|
| LM2902B-Q1 and LM2902BA-Q1 | | | | |
| V _(ESD) | Electrostatic discharge | Human-body model (HBM), per AEC Q100-002 ⁽¹⁾ | ±2000 | V |
| | | Charged-device model (CDM), per AEC Q100-011 | ±1500 | |
| LM2902KV-Q1 and LM2902KAV-Q1 | | | | |
| V _(ESD) | Electrostatic discharge | Human-body model (HBM), per AEC Q100-002 ⁽¹⁾ | ±2000 | V |
| | | Charged-device model (CDM), per AEC Q100-011 | ±2000 | |
| LM2902-Q1 | | | | |
| V _(ESD) | Electrostatic discharge | Charged-device model (CDM), per AEC Q100-011 | ±1500 | V |

- (1) AEC Q100-002 indicates that HBM stressing shall be in accordance with the ANSI/ESDA/JEDEC JS-001 specification.

6.3 Recommended Operating Conditions

over operating ambient temperature range (unless otherwise noted)

| | | MIN | MAX | UNIT |
|---|---------------------------|-----|----------|------------------|
| V_S Supply voltage, $V_S = ([V+] - [V-])$ | LM2902B-Q1, LM2902BA-Q1 | 3 | 36 | V |
| | LM2902KV-Q1, LM2902KAV-Q1 | 3 | 30 | |
| | LM2902-Q1 | 3 | 26 | |
| V_{CM} Common-mode voltage | | V- | (V+) - 2 | V |
| T_A Operating ambient temperature | | -40 | 125 | $^\circ\text{C}$ |

6.4 Thermal Information

| THERMAL METRIC ⁽¹⁾ | | LM2902-Q1, LM2902KV-Q1, LM2902KAV-Q1 | | LM2902B-Q1, LM2902BA-Q1 | | UNIT |
|-------------------------------|--|---|------------|-------------------------|------------|------|
| | | D (SOIC) | PW (TSSOP) | D (SOIC) | PW (TSSOP) | |
| | | 14 PINS | 14 PINS | 14 PINS | 14 PINS | |
| R _{θJA} | Junction-to-ambient thermal resistance | 101 | 86 | TBD | 133.3 | °C/W |
| R _{θJC} | Junction-to-case (top) thermal resistance | — | — | TBD | 63.4 | °C/W |
| R _{θJB} | Junction-to-board thermal resistance | — | — | TBD | 76.5 | °C/W |
| ψ _{JT} | Junction-to-top characterization parameter | — | — | TBD | 15.6 | °C/W |
| ψ _{JB} | Junction-to-board characterization parameter | — | — | TBD | 75.9 | °C/W |

(1) For more information about traditional and new thermal metrics, see the [Semiconductor and IC package thermal metrics](#) application report.

6.5 Electrical Characteristics - LM2902B-Q1 and LM2902BA-Q1

For V_S = (V₊) – (V_–) = 5 V to 36 V (±2.5 V to ±18 V), at T_A = 25°C, V_{CM} = V_{OUT} = V_S / 2, and R_L = 10kΩ connected to V_S / 2 (unless otherwise noted)

| PARAMETER | | TEST CONDITIONS | | MIN | TYP | MAX | UNIT |
|----------------------|--|--|---------------------------------|---------------------------------|------------|----------|------------------|
| OFFSET VOLTAGE | | | | | | | |
| V _{OS} | Input offset voltage | LM2902B-Q1 | | | ±0.3 | ±3.0 | mV |
| | | | T _A = −40°C to 125°C | | | ±4.0 | |
| | | LM2902BA-Q1 | | | ±0.3 | ±2 | |
| | | | T _A = −40°C to 125°C | | | ±2.5 | |
| dV _{OS} /dT | Input offset voltage drift | R _S = 0 Ω | T _A = −40°C to 125°C | | ±7 | | μV/°C |
| PSRR | Input offset voltage versus power supply | | | 65 | 100 | | dB |
| | Channel separation | f = 1 kHz to 20 kHz | | | 120 | | dB |
| INPUT VOLTAGE RANGE | | | | | | | |
| V _{CM} | Common-mode voltage range | V _S = 3 V to 36 V | | V− | (V+) − 1.5 | | V |
| | | V _S = 5 V to 36 V | | T _A = −40°C to 125°C | V− | (V+) − 2 | |
| CMRR | Common-mode rejection ratio | (V−) ≤ V _{CM} ≤ (V+) − 1.5 V | V _S = 3 V to 36 V | | 70 | 80 | dB |
| | | (V−) ≤ V _{CM} ≤ (V+) − 2 V | V _S = 5 V to 36 V | T _A = −40°C to 125°C | 65 | 80 | |
| INPUT BIAS CURRENT | | | | | | | |
| I _B | Input bias current | | | | −10 | −35 | nA |
| | | | | T _A = −40°C to 125°C | | −50 | |
| dI _{OS} /dT | Input offset current drift | | | T _A = −40°C to 125°C | | 10 | pA/°C |
| I _{OS} | Input offset current | | | | ±0.5 | ±4 | nA |
| | | | | T _A = −40°C to 125°C | | ±5 | |
| dI _{OS} /dT | Input offset current drift | | | T _A = −40°C to 125°C | | 10 | pA/°C |
| NOISE | | | | | | | |
| E _N | Input voltage noise | f = 0.1 to 10 Hz | | | 3 | | μV _{PP} |
| e _N | Input voltage noise density | R _S = 100 Ω, V _I = 0 V, f = 1 kHz (see Figure 8) | | | 35 | | nV/√Hz |
| INPUT IMPEDANCE | | | | | | | |
| Z _{ID} | Differential | | | | 10 0.1 | | MΩ pF |
| Z _{ICM} | Common-mode | | | | 4 1.5 | | GΩ pF |
| OPEN-LOOP GAIN | | | | | | | |
| A _{OL} | Open-loop voltage gain | V _S = 15 V, V _O = 1 V to 11 V, R _L ≥ 10 kΩ, connected to (V−) | | 50 | 100 | | V/mV |
| | | | T _A = −40°C to 125°C | 25 | | | |
| FREQUENCY RESPONSE | | | | | | | |
| GBW | Gain-bandwidth product | R _L = 1 MΩ, C _L = 20 pF (see Figure 7) | | | 1.2 | | MHz |
| SR | Slew rate | R _L = 1 MΩ, C _L = 30 pF, V _I = ±10 V (see Figure 7) | | | 0.5 | | V/μs |
| Θ _m | Phase margin | G = + 1, R _L = 10kΩ, C _L = 20 pF | | | 56 | | ° |
| t _S | Settling time | To 0.1%, V _S = 5 V, 2-V Step , G = +1, C _L = 100 pF | | | 4 | | μs |
| | Overload recovery time | V _{IN} × gain > V _S | | | 10 | | μs |

6.5 Electrical Characteristics - LM2902B-Q1 and LM2902BA-Q1 (continued)

For $V_S = (V_+) - (V_-) = 5\text{ V to }36\text{ V}$ ($\pm 2.5\text{ V to } \pm 18\text{ V}$), at $T_A = 25^\circ\text{C}$, $V_{CM} = V_{OUT} = V_S / 2$, and $R_L = 10\text{ k}\Omega$ connected to $V_S / 2$ (unless otherwise noted)

| PARAMETER | | TEST CONDITIONS | | MIN | TYP | MAX | UNIT |
|-------------------|-----------------------------------|--|--------|--|--------------------|------|------|
| THD+N | Total harmonic distortion + noise | G = + 1, f = 1 kHz, V _O = 3.53 V _{RMS} , V _S = 36V, R _L = 100k, I _{OUT} ≤ 50μA, BW = 80 kHz | | 0.001% | | | |
| OUTPUT | | | | | | | |
| V _O | Voltage output swing from rail | Positive Rail (V+) | | I _{OUT} = -50 μA | 1.35 | 1.5 | V |
| V _O | | | | I _{OUT} = -1 mA | 1.4 | 1.6 | V |
| V _O | | | | I _{OUT} = -5 mA | 1.5 | 1.75 | V |
| V _O | | Negative Rail (V-) | | I _{OUT} = 50 μA | 100 | 150 | mV |
| V _O | | | | I _{OUT} = 1 mA | 0.75 | 1 | V |
| V _O | | | | V _S = 5 V, R _L ≤ 10 kΩ connected to (V-) T _A = -40°C to 125°C | 5 | 20 | mV |
| I _O | Output current | V _S = 15 V; V _O = V-; V _{ID} = 1 V | Source | | -20 ⁽¹⁾ | -30 | mA |
| | | | | T _A = -40°C to 125°C | -10 ⁽¹⁾ | | mA |
| | | V _S = 15 V; V _O = V+; V _{ID} = -1 V | Sink | | 10 ⁽¹⁾ | 20 | mA |
| | | | | T _A = -40°C to 125°C | 5 ⁽¹⁾ | | mA |
| | | V _{ID} = -1 V; V _O = (V-) + 200 mV | | | 50 | 85 | μA |
| I _{SC} | Short-circuit current | V _S = 20 V, (V+) = 10 V, (V-) = -10 V, V _O = 0 V | | | ±40 | ±60 | mA |
| C _{LOAD} | Capacitive load drive | | | | 100 | | pF |
| R _O | Open-loop output impedance | f = 1 MHz, I _O = 0 A | | | 300 | | Ω |
| POWER SUPPLY | | | | | | | |
| I _Q | Quiescent current per amplifier | V _S = 5 V; I _O = 0 A | | T _A = -40°C to 125°C | 175 | 300 | μA |
| | | V _S = 36 V; I _O = 0 A | | T _A = -40°C to 125°C | 350 | 750 | μA |

(1) Specified by design and characterization only.

6.6 Electrical Characteristics: LM2902-Q1, LM2902KV-Q1, LM2902KAV-Q1

For $V_S = (V_+) - (V_-) = 5\text{ V}$, at $T_A = 25^\circ\text{C}$ (unless otherwise noted)

| PARAMETER | | TEST CONDITIONS | | TA ⁽¹⁾ | MIN | TYP ⁽²⁾ | MAX | UNIT | |
|-----------------------------------|--|---|--------------------|-------------------|----------------------------|--------------------|------|-------|--|
| V _{IO} | Input offset voltage | V _{CC} = 5 V to 26 V, V _{IC} = V _{ICRmin} , V _O = 1.4 V | | 25°C | | 3 | 7 | mV | |
| | | | | Full Range | | | 10 | | |
| I _{IO} | Input offset current | V _O = 1.4 V | | 25°C | | 2 | 50 | nA | |
| | | | | Full Range | | | 300 | | |
| I _{IB} | Input bias current | V _O = 1.4 V | | 25°C | | –20 | –250 | nA | |
| | | | | Full Range | | | –500 | | |
| V _{ICR} | Common-mode input voltage range | V _{CC} = 5 V to 26 V | | 25°C | V- | (V+) - 1.5 | | V | |
| | | | | Full Range | V- | (V+) - 2 | | | |
| V _{OH} | High-level output voltage | R _L = 10 kΩ | | 25°C | (V+) – 1.5 | | | V | |
| | | V _{CC} = 26 V, R _L = 2 kΩ | | Full Range | 22 | | | | |
| | | V _{CC} = 26 V R _L ≥ 10 kΩ | | Full Range | 23 | 24 | | | |
| V _{OL} | Low-level output voltage | R _L ≤ 10 kΩ | | Full Range | | 5 | 20 | mV | |
| A _{VD} | Large-signal differential voltage amplification | V _{CC} = 15 V, V _O = 1 V to 11 V, R _L ≥ 2 kΩ | | 25°C | | 100 | | V/mV | |
| | | | | Full Range | | 15 | | | |
| CMRR | Common-mode rejection ratio | V _{IC} = V _{ICRmin} | | 25°C | 50 | 80 | | dB | |
| k _{SVR} | Supply-voltage rejection ratio (ΔV _{CC} /ΔV _{IO}) | | | 25°C | 50 | 100 | | dB | |
| V _{O1} / V _{O2} | Crosstalk attenuation | f = 1 kHz to 20 kHz | | 25°C | | 120 | | dB | |
| I _O | Output current | V _{CC} = 15 V, V _O = 0 V _{ID} = 1 V, | | 25°C | –20 | –30 | –60 | mA | |
| | | | | Full Range | –10 | | | | |
| | | V _{CC} = 15 V, V _O = 15 V V _{ID} = –1 V, | | 25°C | 10 | 20 | | | |
| | | | | Full Range | 5 | | | | |
| | | V _{ID} = –1 V V _O = 200 mV | | 25°C | | 30 | | μA | |
| I _{OS} | Short-circuit output current | V _{CC} at 5 V, GND at –5 V | V _O = 0 | 25°C | | ±40 | ±60 | mA | |
| I _{CC} | Supply current (four amplifiers) | V _O = 2.5 V | No load | Full Range | | 0.7 | 1.2 | mA | |
| | | V _{CC} = 26 V, V _O = 0.5 V _{CC} | No load | Full Range | | 1.4 | 3 | | |
| V _{IO} | Input offset voltage | V _{CC} = 5 V to 32 V, V _{IC} = V _{ICRmin} V _O = 1.4 V | Non-A devices | 25°C | | 3 | 7 | mV | |
| | | | | Full Range | | | 10 | | |
| | | | A-suffix devices | 25°C | | 1 | 2 | | |
| | | | | Full Range | | | 4 | | |
| ΔV _{IO} /ΔT | Temperature drift | R _S = 0 Ω | | Full Range | | 7 | | μV/°C | |
| I _{IO} | Input offset current | V _O = 1.4 V | | 25°C | | 2 | 50 | nA | |
| | | | | Full Range | | | 150 | | |
| ΔI _{IO} /ΔT | Temperature drift | | | Full Range | | 10 | | pA/°C | |
| I _{IB} | Input bias current | V _O = 1.4 V | | 25°C | | –20 | –250 | nA | |
| | | | | Full Range | | | –500 | | |
| V _{ICR} | Common-mode input voltage range | V _{CC} = 5 V to 32 V | | 25°C | 0 to V _{CC} – 1.5 | | | V | |
| | | | | Full Range | 0 to V _{CC} – 2 | | | | |
| V _{OH} | High-level output voltage | R _L = 10 kΩ | | 25°C | V _{CC} – 1.5 | | | V | |
| | | V _{CC} = 32 V R _L = 2 kΩ | | Full Range | 26 | | | | |
| | | V _{CC} = 32 V R _L ≥ 10 kΩ | | Full Range | 27 | | | | |
| V _{OL} | Low-level output voltage | R _L ≤ 10 kΩ | | Full Range | | 5 | 20 | mV | |

6.6 Electrical Characteristics: LM2902-Q1, LM2902KV-Q1, LM2902KAV-Q1 (continued)

For $V_S = (V_+) - (V_-) = 5\text{ V}$, at $T_A = 25^\circ\text{C}$ (unless otherwise noted)

| PARAMETER | | TEST CONDITIONS | $T_A^{(1)}$ | MIN | TYP ⁽²⁾ | MAX | UNIT |
|-------------------|---|---|--------------------|-----|--------------------|----------|---------------|
| A_{VD} | Large-signal differential voltage amplification | $V_{CC} = 15\text{ V}$, $V_O = 1\text{ V}$ to 11 V , $R_L \geq 2\text{ k}\Omega$ | 25°C | 25 | 100 | | V/mV |
| | | | Full Range | 15 | | | |
| | Amplifier-to-amplifier coupling ⁽³⁾ | $f = 1\text{ kHz}$ to 20 kHz , input referred | 25°C | | 120 | | dB |
| CMRR | Common-mode rejection ratio | $V_{IC} = V_{ICRmin}$ | 25°C | 60 | 80 | | dB |
| k_{SVR} | Supply-voltage rejection ratio ($\Delta V_{CC} / \Delta V_{IO}$) | | 25°C | 60 | 100 | | dB |
| V_{O1} / V_{O2} | Crosstalk attenuation | $f = 1\text{ kHz}$ to 20 kHz | 25°C | | 120 | | dB |
| I_O | Output current | $V_{CC} = 15$, $V_O = 0$ $V_{ID} = 1\text{ V}$ | 25°C | -20 | -30 | -60 | mA |
| | | | Full Range | -10 | | | |
| | | $V_{CC} = 15$, $V_O = 15\text{ V}$ $V_{ID} = -1\text{ V}$ | 25°C | 10 | 20 | | |
| | | | Full Range | 5 | | | |
| | | $V_{ID} = -1\text{ V}$ $V_O = 200\text{ mV}$ | 25°C | 12 | 40 | | μA |
| I_{OS} | Short-circuit output current | V_{CC} at 5 V , GND at -5 V $V_O = 0$ | 25°C | | ± 40 | ± 60 | mA |
| I_{CC} | Supply current (four amplifiers) | $V_O = 2.5\text{ V}$ No load | Full Range | | 0.7 | 1.2 | mA |
| | | $V_{CC} = 32\text{ V}$, $V_O = 0.5 V_{CC}$ No load | Full Range | | 1.4 | 3 | |

(1) Full range is -40°C to 125°C .

(2) All typical values are at $T_A = 25^\circ\text{C}$.

(3) Due to proximity of external components, ensure that coupling is not originating via stray capacitance between these external parts. Typically, this can be detected, as this type of coupling increases at higher frequencies.

6.7 Operating Conditions: LM2902-Q1, LM2902KV-Q1, LM2902KAV-Q1

For $V_S = (V_+) - (V_-) = 15\text{ V}$, at $T_A = 25^\circ\text{C}$

| PARAMETER | | TEST CONDITIONS | TYP | UNIT |
|-----------|--------------------------------|--|-----|------------------------|
| SR | Slew rate at unity gain | $R_L = 1\text{ M}\Omega$, $C_L = 30\text{ pF}$, $V_I = \pm 10\text{ V}$ (see Figure 7-1) | 0.5 | V/ μs |
| B_1 | Unity-gain bandwidth | $R_L = 1\text{ M}\Omega$, $C_L = 20\text{ pF}$ (see Figure 7-1) | 1.2 | MHz |
| V_N | Equivalent input noise voltage | $R_S = 100\text{ }\Omega$, $V_I = 0\text{ V}$, $f = 1\text{ kHz}$ (see Figure 7-2) | 35 | nV/ $\sqrt{\text{Hz}}$ |

6.8 Typical Characteristics

This typical characteristics section is applicable for LM2902B-Q1 and LM2902BA-Q1. Typical characteristics data in this section was taken with $T_A = 25^\circ\text{C}$, $V_S = 36\text{ V}$ ($\pm 18\text{ V}$), $V_{CM} = V_S / 2$, $R_{LOAD} = 10\text{ k}\Omega$ connected to $V_S / 2$ (unless otherwise noted).

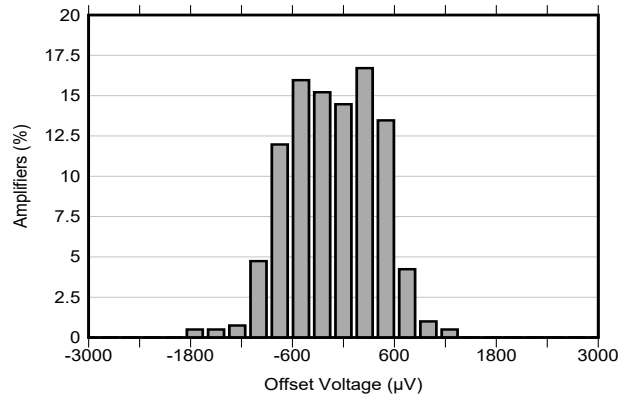


Figure 6-1. Offset Voltage Production Distribution

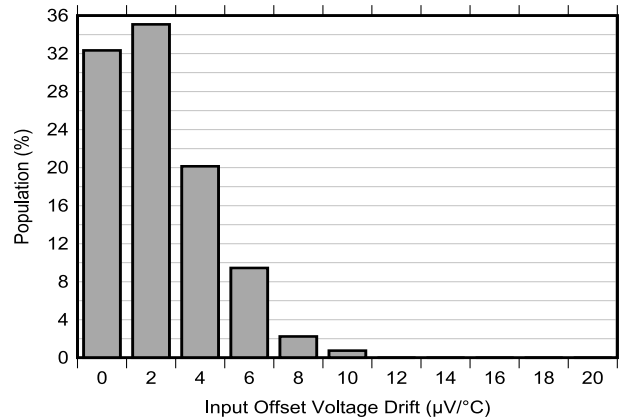


Figure 6-2. Offset Voltage Drift Distribution

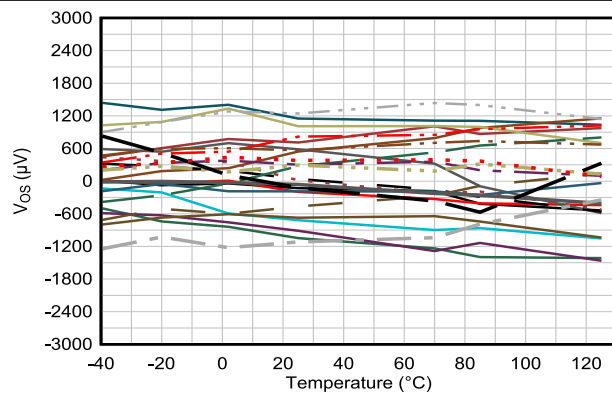


Figure 6-3. Offset Voltage vs Temperature

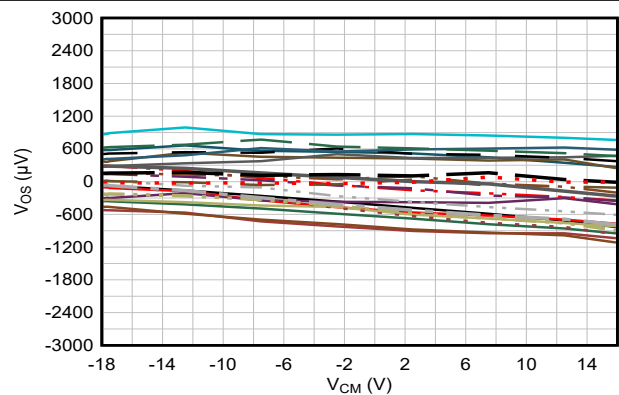


Figure 6-4. Offset Voltage vs Common-Mode Voltage

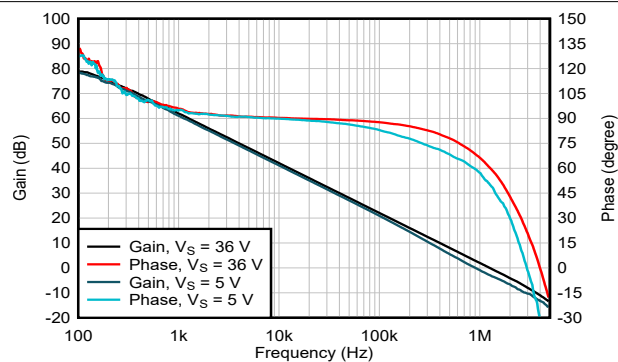


Figure 6-5. Open-Loop Gain and Phase vs Frequency

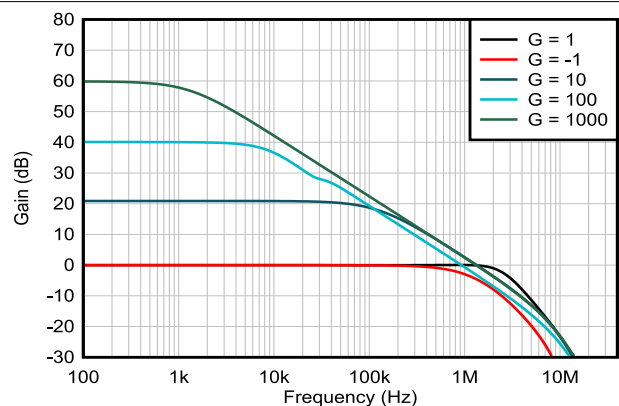


Figure 6-6. Closed-Loop Gain vs Frequency

6.8 Typical Characteristics (continued)

This typical characteristics section is applicable for LM2902B-Q1 and LM2902BA-Q1. Typical characteristics data in this section was taken with $T_A = 25^\circ\text{C}$, $V_S = 36\text{ V}$ ($\pm 18\text{ V}$), $V_{CM} = V_S / 2$, $R_{LOAD} = 10\text{ k}\Omega$ connected to $V_S / 2$ (unless otherwise noted).

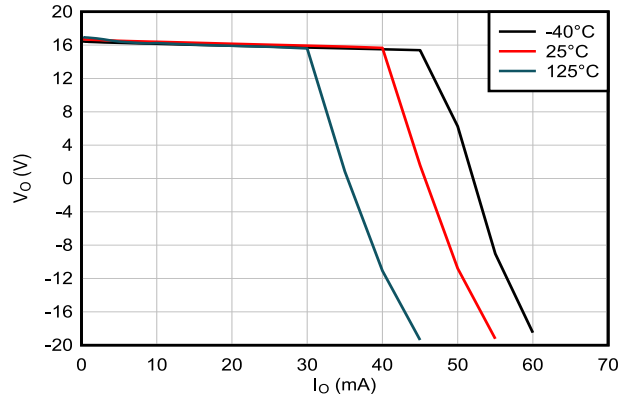


Figure 6-7. Output Voltage Swing vs Output Current (Sourcing)

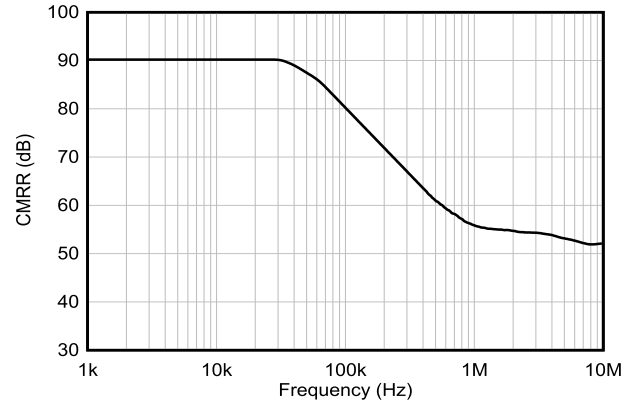


Figure 6-8. CMRR vs Frequency

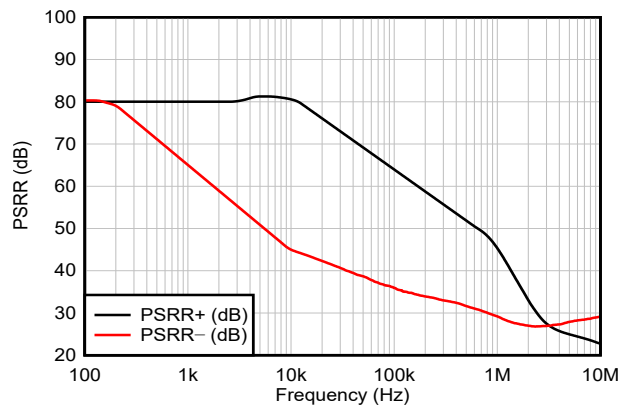


Figure 6-9. PSRR vs Frequency

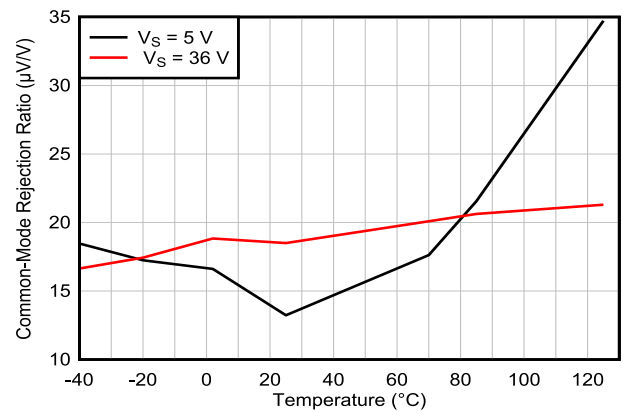


Figure 6-10. Common-Mode Rejection Ratio vs Temperature (dB)

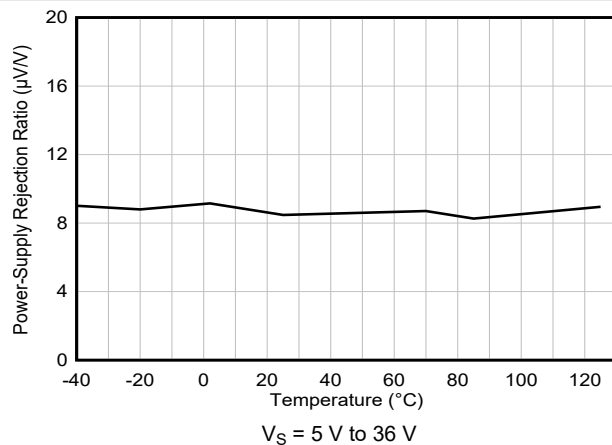


Figure 6-11. Power Supply Rejection Ratio vs Temperature (dB)

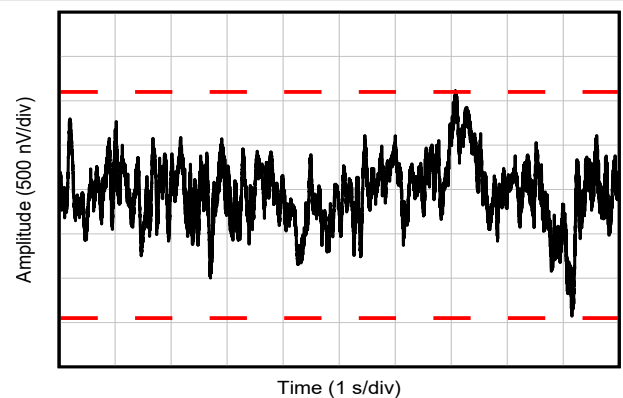


Figure 6-12. 0.1-Hz to 10-Hz Noise

6.8 Typical Characteristics (continued)

This typical characteristics section is applicable for LM2902B-Q1 and LM2902BA-Q1. Typical characteristics data in this section was taken with $T_A = 25^\circ\text{C}$, $V_S = 36\text{ V}$ ($\pm 18\text{ V}$), $V_{CM} = V_S / 2$, $R_{LOAD} = 10\text{ k}\Omega$ connected to $V_S / 2$ (unless otherwise noted).



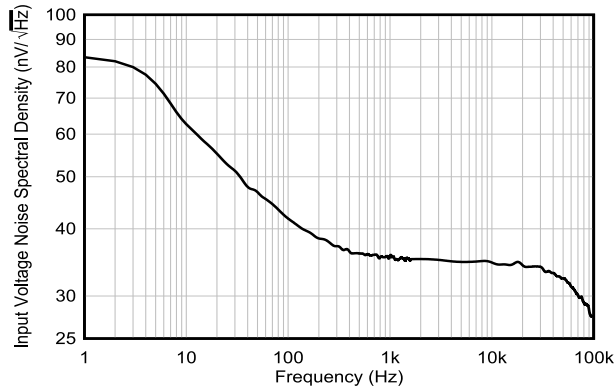


Figure 6-13. Input Voltage Noise Spectral Density vs Frequency

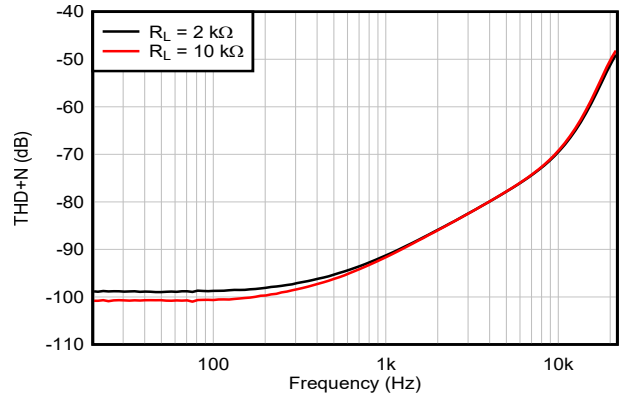


$G = 1$, $f = 1\text{ kHz}$, $BW = 80\text{ kHz}$,
 $V_{OUT} = 10\text{ V}_{PP}$, R_L connected to V_-

Figure 6-14. THD+N Ratio vs Frequency, $G = 1$

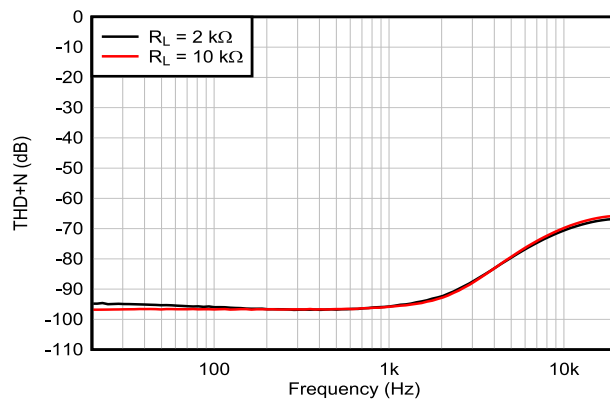

$G = -1$, $f = 1\text{ kHz}$, $BW = 80\text{ kHz}$,
 $V_{OUT} = 10\text{ V}_{PP}$, R_L connected to V_-
 See [Section 7](#)

Figure 6-15. THD+N Ratio vs Frequency, $G = -1$

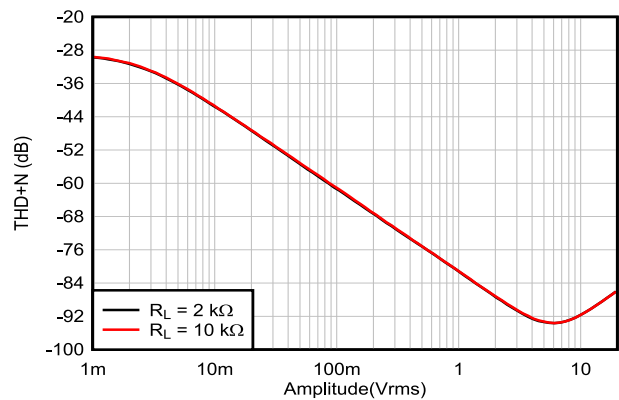


$G = 1$, $f = 1\text{ kHz}$, $BW = 80\text{ kHz}$,
 R_L connected to V_-

Figure 6-16. THD+N vs Output Amplitude, $G = 1$

6.8 Typical Characteristics (continued)

This typical characteristics section is applicable for LM2902B-Q1 and LM2902BA-Q1. Typical characteristics data in this section was taken with $T_A = 25^\circ\text{C}$, $V_S = 36\text{ V}$ ($\pm 18\text{ V}$), $V_{CM} = V_S / 2$, $R_{LOAD} = 10\text{ k}\Omega$ connected to $V_S / 2$ (unless otherwise noted).

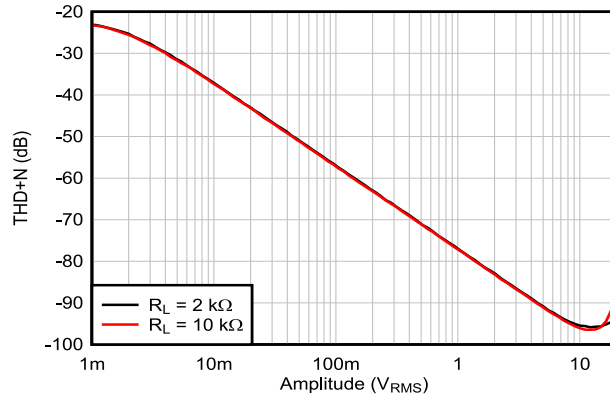

$G = -1$, $f = 1\text{ kHz}$, $BW = 80\text{ kHz}$,
 R_L connected to V_-
See [Section 7](#)

Figure 6-17. THD+N vs Output Amplitude, $G = -1$

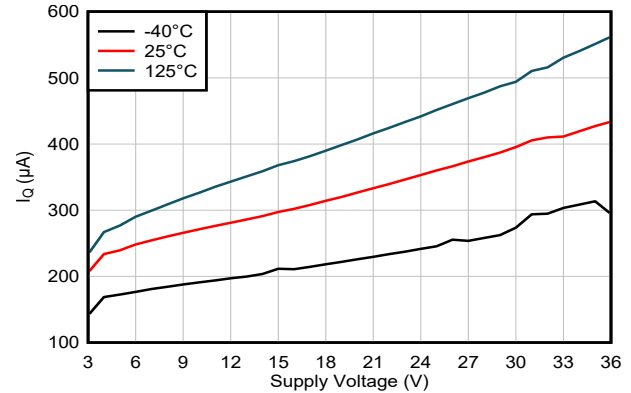


Figure 6-18. Quiescent Current vs Supply Voltage

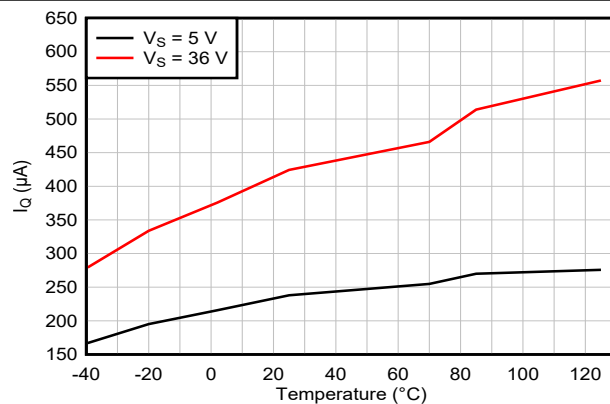


Figure 6-19. Quiescent Current vs Temperature



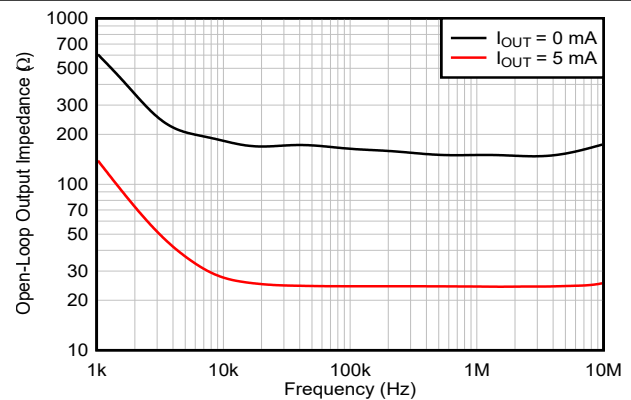


Figure 6-20. Open-Loop Output Impedance vs Frequency

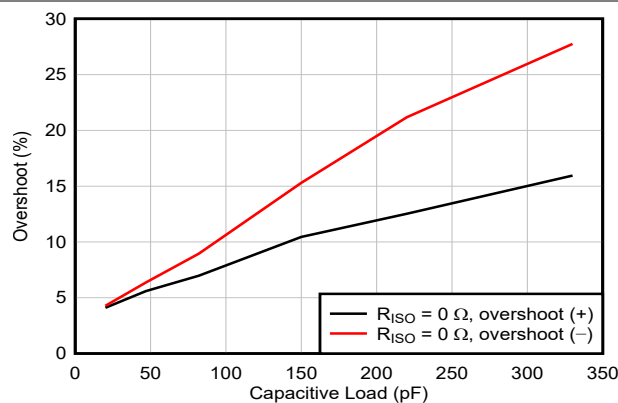

$G = 1$, 100-mV output step, R_L = open

Figure 6-21. Small-Signal Overshoot vs Capacitive Load

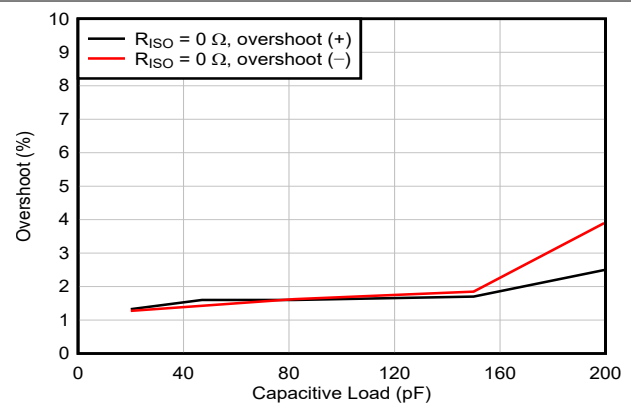

$G = -1$, 100-mV output step, R_L = open

Figure 6-22. Small-Signal Overshoot vs Capacitive Load

6.8 Typical Characteristics (continued)

This typical characteristics section is applicable for LM2902B-Q1 and LM2902BA-Q1. Typical characteristics data in this section was taken with $T_A = 25^\circ\text{C}$, $V_S = 36\text{ V}$ ($\pm 18\text{ V}$), $V_{CM} = V_S / 2$, $R_{LOAD} = 10\text{ k}\Omega$ connected to $V_S / 2$ (unless otherwise noted).

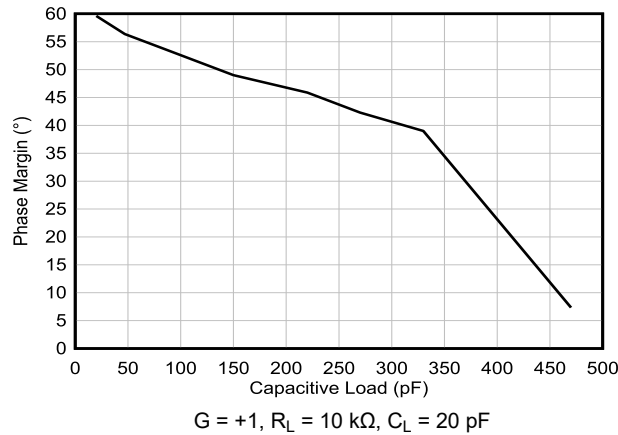


Figure 6-23. Phase Margin vs Capacitive Load

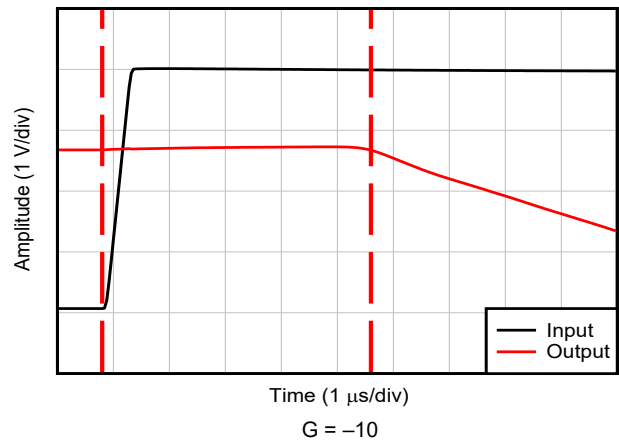


Figure 6-24. Overload Recovery (Positive Rail)

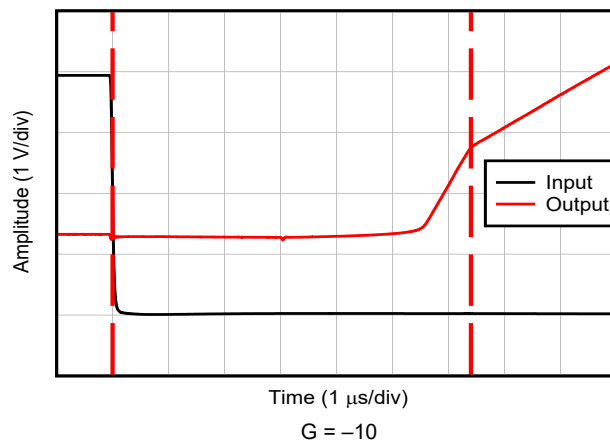


Figure 6-25. Overload Recovery (Negative Rail)

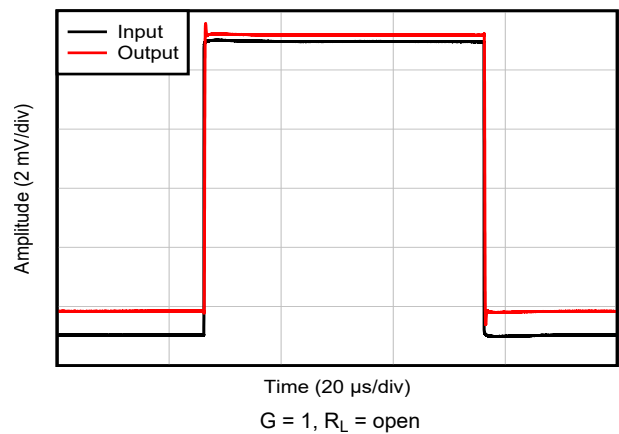


Figure 6-26. Small-Signal Step Response, $G = 1$

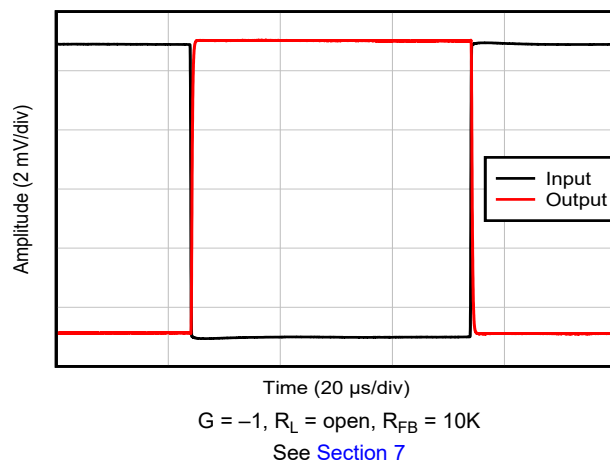


Figure 6-27. Small-Signal Step Response, $G = -1$

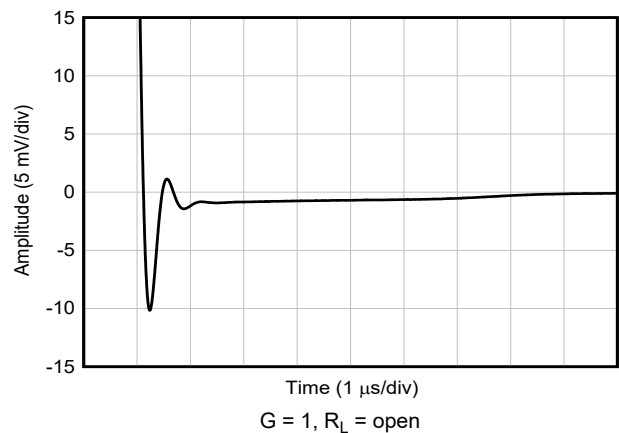


Figure 6-28. Large-Signal Step Response (Falling)

6.8 Typical Characteristics (continued)

This typical characteristics section is applicable for LM2902B-Q1 and LM2902BA-Q1. Typical characteristics data in this section was taken with $T_A = 25^\circ\text{C}$, $V_S = 36\text{ V}$ ($\pm 18\text{ V}$), $V_{CM} = V_S / 2$, $R_{LOAD} = 10\text{ k}\Omega$ connected to $V_S / 2$ (unless otherwise noted).

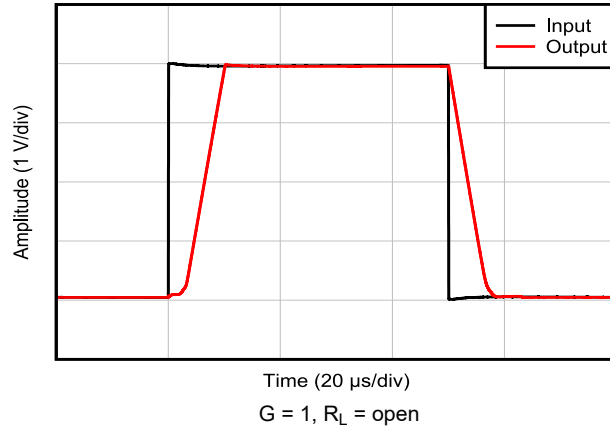


Figure 6-29. Large-Signal Step Response, $G = 1$

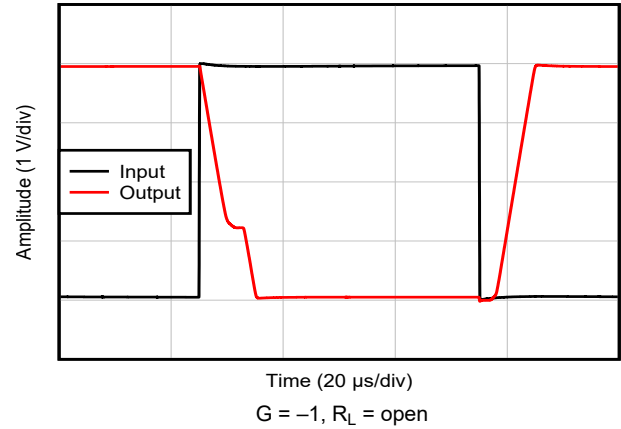


Figure 6-30. Large-Signal Step Response, $G = -1$

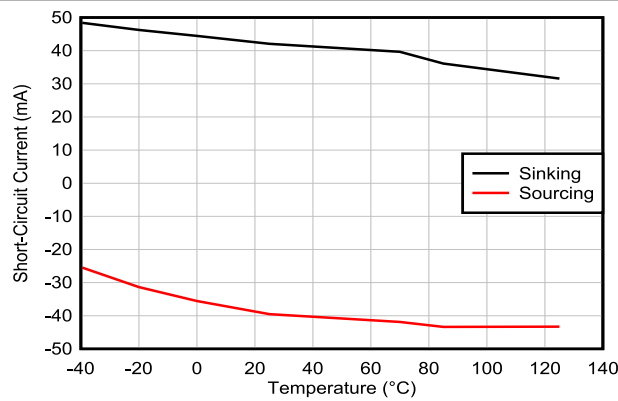


Figure 6-31. Short-Circuit Current vs Temperature

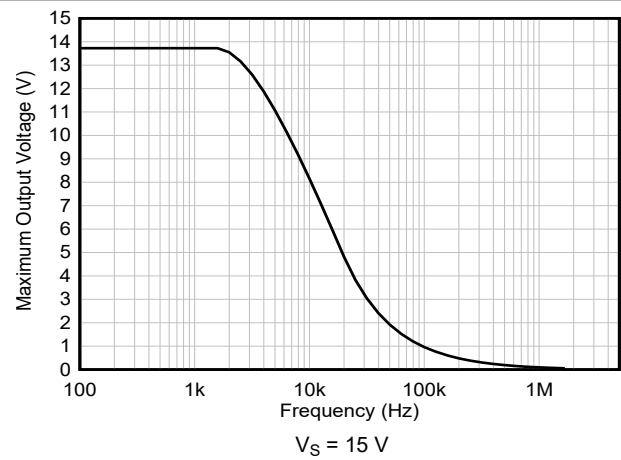


Figure 6-32. Maximum Output Voltage vs Frequency

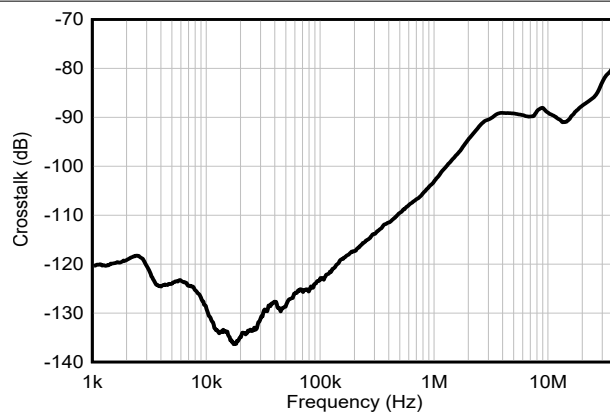


Figure 6-33. Channel Separation vs Frequency

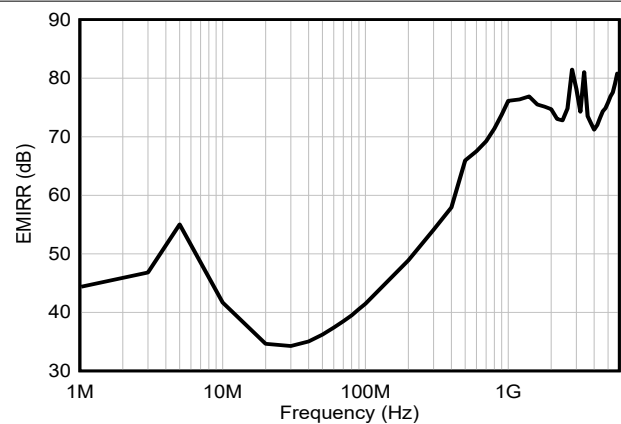


Figure 6-34. EMIRR (Electromagnetic Interference Rejection Ratio) vs Frequency

7 Parameter Measurement Information

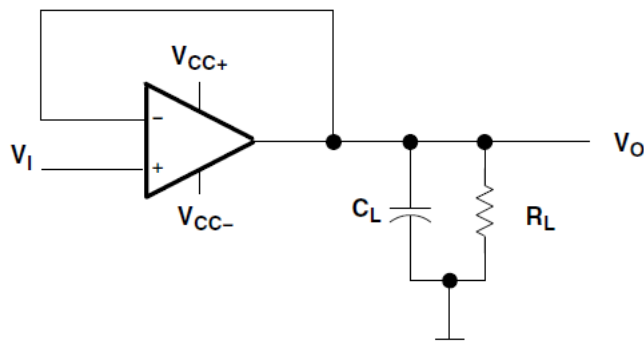


Figure 7-1. Unity-Gain Amplifier

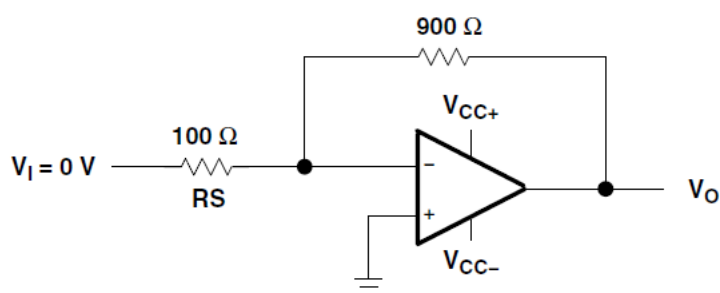


Figure 7-2. Noise-Test Circuit


8 Detailed Description

8.1 Overview

The LM2902-Q1, LM2902B-Q1, and LM2902BA-Q1 devices consist of four independent, high-gain frequency-compensated operational amplifiers designed to operate from a single supply over a wide range of voltages. Operation from split supplies also is possible if the difference between the two supplies is within the supply voltage range, and V_S is at least 1.5 V more positive than the input common-mode voltage. The low supply-current drain is independent of the magnitude of the supply voltage.

Applications include transducer amplifiers, DC amplification blocks, and all the conventional operational amplifier circuits that now can be implemented more easily in single-supply-voltage systems. For example, these devices can be operated directly from the standard 5-V supply used in digital systems and easily can provide the required interface electronics without additional ± 5 -V supplies.

8.2 Functional Block Diagram

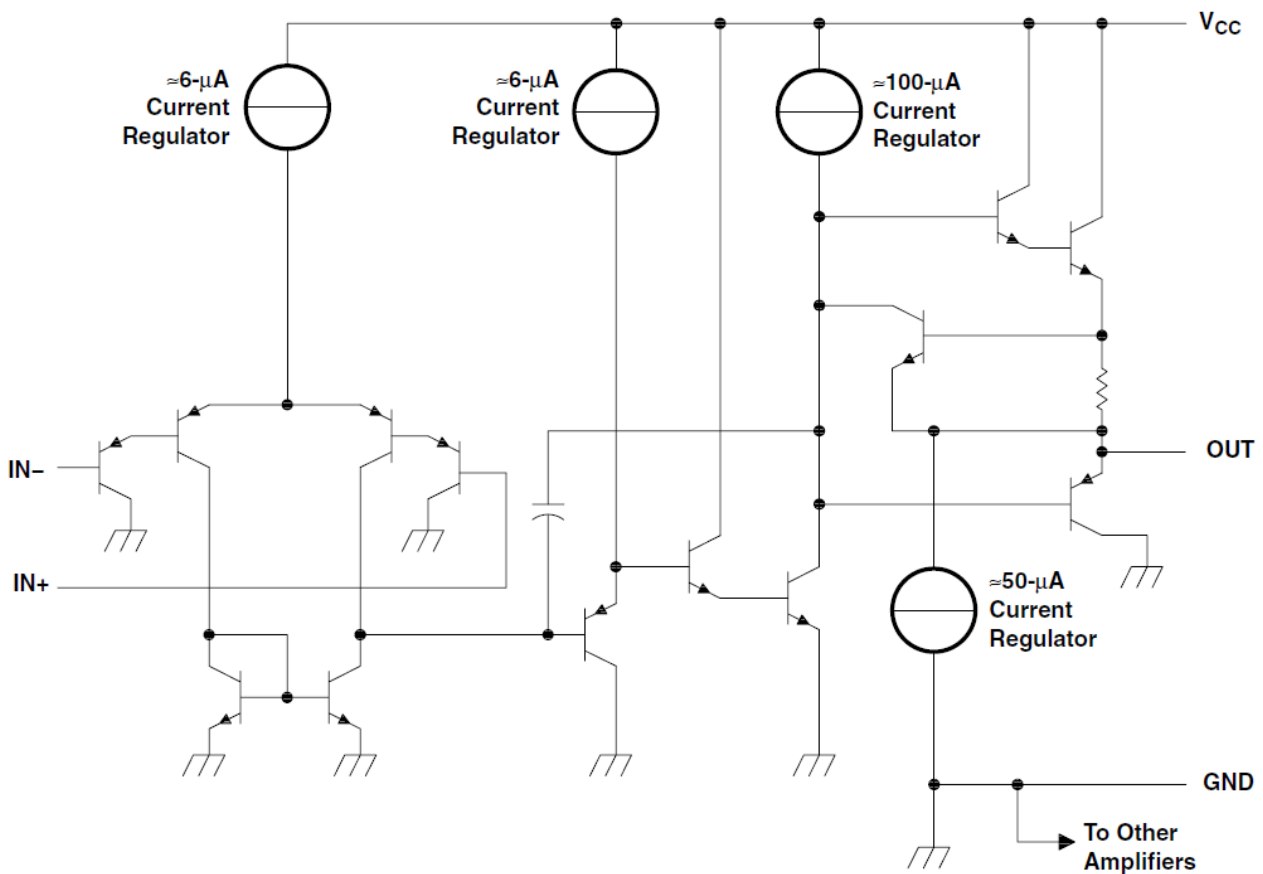

Schematic (Each Amplifier)

8.3 Feature Description

8.3.1 Input Common Mode Range

The valid common mode range is from device ground to $V_S - 1.5$ V ($V_S - 2$ V across temperature). Inputs may exceed V_S up to the maximum V_S without device damage. At least one input must be in the valid input common-mode range for the output to be the correct phase. If both inputs exceed the valid range, then the output phase is undefined. If either input more than 0.3 V below V_- then input current should be limited to 1 mA and the output phase is undefined.

8.4 Device Functional Modes

The LM2902-Q1, LM2902B-Q1, and LM2902BA-Q1 devices are powered on when the supply is connected. This device can be operated as a single-supply operational amplifier or dual-supply amplifier, depending on the application.

9 Application and Implementation

Note

Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes, as well as validating and testing their design implementation to confirm system functionality.

9.1 Application Information

The LM2902-Q1, LM2902B-Q1, LM2902BA-Q1 operational amplifiers are useful in a wide range of signal conditioning applications. Inputs can be powered before V_S for flexibility in multiple supply circuits. For full application design guidelines related to this family of devices, please refer to the application report [Application design guidelines for LM324/LM358 devices](#).

9.2 Typical Application

A typical application for an operational amplifier is an inverting amplifier. This amplifier takes a positive voltage on the input, and makes it a negative voltage of the same magnitude. In the same manner, it also makes negative voltages positive.

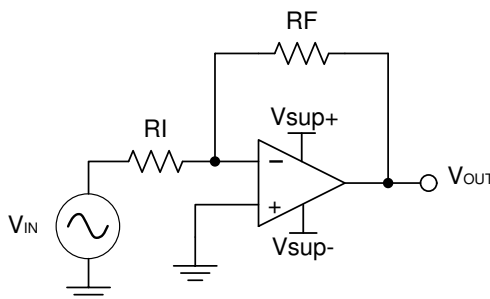


Figure 9-1. Application Schematic

9.2.1 Design Requirements

The supply voltage must be chosen such that it is larger than the input voltage range and output range. For instance, this application scales a signal of ± 0.5 V to ± 1.8 V. Setting the supply at ± 12 V is sufficient to accommodate this application.

9.2.2 Detailed Design Procedure

Determine the gain required by the inverting amplifier using [Equation 1](#) and [Equation 2](#):

$$A_V = \frac{V_{OUT}}{V_{IN}} \quad (1)$$

$$A_V = \frac{1.8}{-0.5} = -3.6 \quad (2)$$

Once the desired gain is determined, choose a value for R_I or R_F . Choosing a value in the kilohm range is desirable because the amplifier circuit uses currents in the milliampere range. This allows the part to not draw too much current. This example uses 10 k Ω for R_I which means 36 k Ω is used for R_F . This was determined by [Equation 3](#).

$$A_V = -\frac{R_F}{R_I} \quad (3)$$

9.2.3 Application Curve

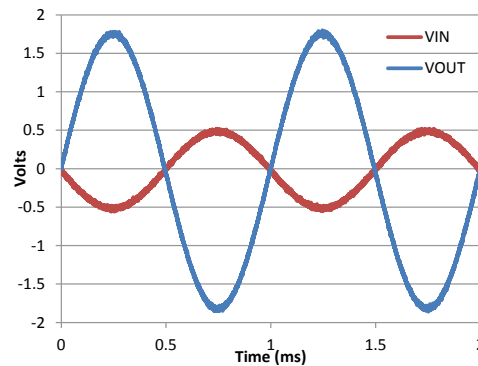


Figure 9-2. Input and Output Voltages of the Inverting Amplifier

9.3 Power Supply Recommendations

CAUTION

Supply voltages larger than specified in the recommended operating region can permanently damage the device (see [Section 6.1](#)).

Place 0.1- μ F bypass capacitors close to the power-supply pins to reduce errors coupling in from noisy or high-impedance power supplies. For more detailed information on bypass capacitor placement, see [Section 9.4](#).

9.4 Layout

9.4.1 Layout Guidelines

For best operational performance of the device, use good PCB layout practices, including:

- Noise can propagate into analog circuitry through the power pins of the circuit as a whole, as well as the operational amplifier. Bypass capacitors are used to reduce the coupled noise by providing low-impedance power sources local to the analog circuitry.
 - Connect low-ESR, 0.1- μ F ceramic bypass capacitors between each supply pin and ground, placed as close to the device as possible. A single bypass capacitor from V+ to ground is applicable for single-supply applications.
- Separate grounding for analog and digital portions of circuitry is one of the simplest and most-effective methods of noise suppression. One or more layers on multilayer PCBs are usually devoted to ground planes. A ground plane helps distribute heat and reduces EMI noise pickup. Make sure to physically separate digital and analog grounds, paying attention to the flow of the ground current.
- To reduce parasitic coupling, run the input traces as far away from the supply or output traces as possible. If it is not possible to keep them separate, it is much better to cross the sensitive trace perpendicular as opposed to in parallel with the noisy trace.
- Place the external components as close to the device as possible. Keeping R_F and R_G close to the inverting input minimizes parasitic capacitance, as shown in [Figure 9-3](#).
- Keep the length of input traces as short as possible. Always remember that the input traces are the most sensitive part of the circuit.
- Consider a driven, low-impedance guard ring around the critical traces. A guard ring can significantly reduce leakage currents from nearby traces that are at different potentials.

9.4.2 Layout Example

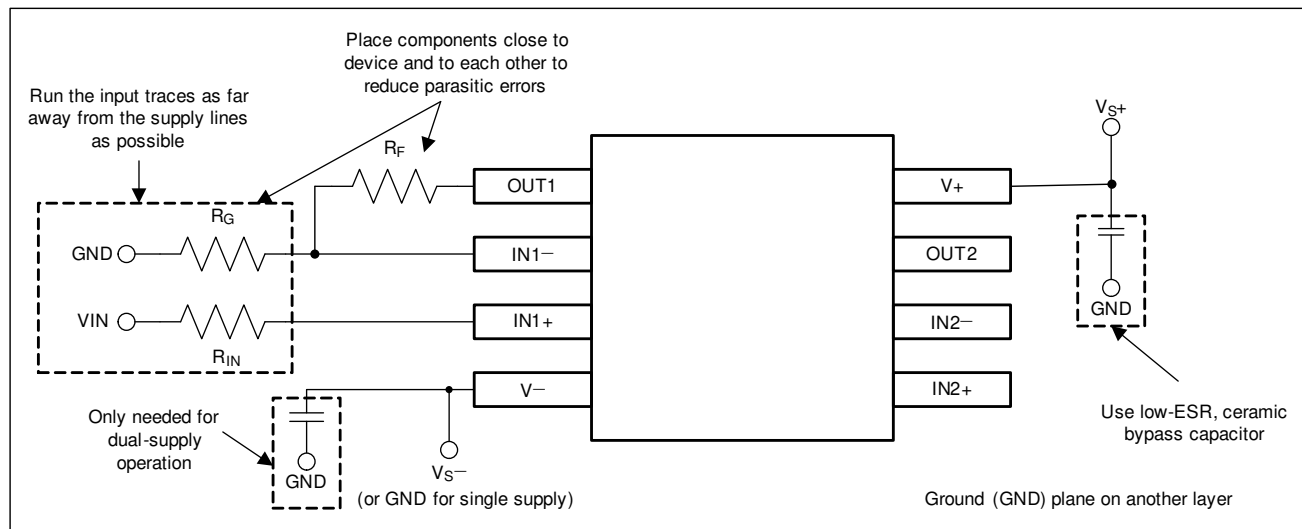


Figure 9-3. Operational Amplifier Board Layout for Noninverting Configuration

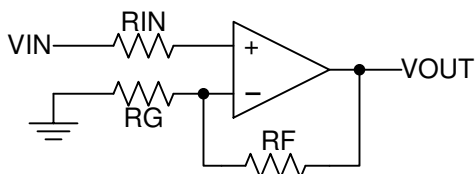


Figure 9-4. Operational Amplifier Schematic for Noninverting Configuration

10 Device and Documentation Support

10.1 Documentation Support

10.1.1 Related Documentation

For related documentation, see the following:

- Texas Instruments, [Application Design Guidelines for LM324/LM358 Devices application note](#)

10.2 Receiving Notification of Documentation Updates

To receive notification of documentation updates, navigate to the device product folder on [ti.com](#). Click on *Subscribe to updates* to register and receive a weekly digest of any product information that has changed. For change details, review the revision history included in any revised document.

10.3 Support Resources

[TI E2E™ support forums](#) are an engineer's go-to source for fast, verified answers and design help — straight from the experts. Search existing answers or ask your own question to get the quick design help you need.

Linked content is provided "AS IS" by the respective contributors. They do not constitute TI specifications and do not necessarily reflect TI's views; see TI's [Terms of Use](#).

10.4 Trademarks

TI E2E™ is a trademark of Texas Instruments.

All trademarks are the property of their respective owners.

10.5 Electrostatic Discharge Caution



This integrated circuit can be damaged by ESD. Texas Instruments recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

10.6 Glossary

[TI Glossary](#) This glossary lists and explains terms, acronyms, and definitions.

11 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.

PACKAGING INFORMATION

| Orderable Device | Status (1) | Package Type | Package Drawing | Pins | Package Qty | Eco Plan (2) | Lead finish/ Ball material (6) | MSL Peak Temp (3) | Op Temp (°C) | Device Marking (4/5) | Samples |
|------------------|---------------|--------------|-----------------|------|-------------|-----------------|--------------------------------------|----------------------|--------------|-------------------------|-------------------------|
| LM2902BAQPWRQ1 | ACTIVE | TSSOP | PW | 14 | 3000 | RoHS & Green | NIPDAU | Level-1-260C-UNLIM | -40 to 125 | 2902BAQ | Samples |
| LM2902BQPWRQ1 | ACTIVE | TSSOP | PW | 14 | 3000 | RoHS & Green | NIPDAU | Level-1-260C-UNLIM | -40 to 125 | L2902BQ | Samples |
| LM2902KAVQDRQ1 | ACTIVE | SOIC | D | 14 | 2500 | RoHS & Green | NIPDAU | Level-1-260C-UNLIM | -40 to 125 | 2902KAQ | Samples |
| LM2902KAVQPWRQ1 | ACTIVE | TSSOP | PW | 14 | 2000 | RoHS & Green | NIPDAU | Level-1-260C-UNLIM | -40 to 125 | 2902KAQ | Samples |
| LM2902KVQDRQ1 | ACTIVE | SOIC | D | 14 | 2500 | RoHS & Green | NIPDAU | Level-1-260C-UNLIM | -40 to 125 | 2902KVQ | Samples |
| LM2902KVQPWRQ1 | ACTIVE | TSSOP | PW | 14 | 2000 | RoHS & Green | NIPDAU | Level-1-260C-UNLIM | -40 to 125 | 2902KVQ | Samples |
| LM2902QDRQ1 | ACTIVE | SOIC | D | 14 | 2500 | RoHS & Green | NIPDAU | Level-1-260C-UNLIM | -40 to 125 | 2902Q1 | Samples |
| LM2902QPWRQ1 | ACTIVE | TSSOP | PW | 14 | 2000 | RoHS & Green | NIPDAU | Level-1-260C-UNLIM | -40 to 125 | 2902Q1 | Samples |
| PLM2902BQDRQ1 | ACTIVE | SOIC | D | 14 | 3000 | TBD | Call TI | Call TI | | | Samples |

(1) The marketing status values are defined as follows:

ACTIVE: Product device recommended for new designs.

LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

PREVIEW: Device has been announced but is not in production. Samples may or may not be available.

OBSOLETE: TI has discontinued the production of the device.

(2) **RoHS:** TI defines "RoHS" to mean semiconductor products that are compliant with the current EU RoHS requirements for all 10 RoHS substances, including the requirement that RoHS substance do not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, "RoHS" products are suitable for use in specified lead-free processes. TI may reference these types of products as "Pb-Free".

RoHS Exempt: TI defines "RoHS Exempt" to mean products that contain lead but are compliant with EU RoHS pursuant to a specific EU RoHS exemption.

Green: TI defines "Green" to mean the content of Chlorine (Cl) and Bromine (Br) based flame retardants meet JS709B low halogen requirements of <=1000ppm threshold. Antimony trioxide based flame retardants must also meet the <=1000ppm threshold requirement.

(3) MSL, Peak Temp. - The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

(4) There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.

(5) Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "~" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.

(6) Lead finish/Ball material - Orderable Devices may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

OTHER QUALIFIED VERSIONS OF LM2902-Q1, LM2902B-Q1, LM2902BA-Q1 :

- Catalog : [LM2902](#), [LM2902B](#), [LM2902BA](#)
- Enhanced Product : [LM2902-EP](#)

NOTE: Qualified Version Definitions:

- Catalog - TI's standard catalog product
- Enhanced Product - Supports Defense, Aerospace and Medical Applications

TAPE AND REEL INFORMATION



*All dimensions are nominal

| Device | Package Type | Package Drawing | Pins | SPQ | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|-------------------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| LM2902BAQPWRQ1 | TSSOP | PW | 14 | 3000 | 330.0 | 12.4 | 6.9 | 5.6 | 1.6 | 8.0 | 12.0 | Q1 |
| LM2902BQPWRQ1 | TSSOP | PW | 14 | 3000 | 330.0 | 12.4 | 6.9 | 5.6 | 1.6 | 8.0 | 12.0 | Q1 |
| LM2902KAVQPWRG4Q1 | TSSOP | PW | 14 | 2000 | 330.0 | 12.4 | 6.9 | 5.6 | 1.6 | 8.0 | 12.0 | Q1 |
| LM2902KAVQPWRQ1 | TSSOP | PW | 14 | 2000 | 330.0 | 12.4 | 6.9 | 5.6 | 1.6 | 8.0 | 12.0 | Q1 |
| LM2902KVQPWRG4Q1 | TSSOP | PW | 14 | 2000 | 330.0 | 12.4 | 6.9 | 5.6 | 1.6 | 8.0 | 12.0 | Q1 |
| LM2902KVQPWRQ1 | TSSOP | PW | 14 | 2000 | 330.0 | 12.4 | 6.9 | 5.6 | 1.6 | 8.0 | 12.0 | Q1 |
| LM2902QPWRG4Q1 | TSSOP | PW | 14 | 2000 | 330.0 | 12.4 | 6.9 | 5.6 | 1.6 | 8.0 | 12.0 | Q1 |
| LM2902QPWRQ1 | TSSOP | PW | 14 | 2000 | 330.0 | 12.4 | 6.9 | 5.6 | 1.6 | 8.0 | 12.0 | Q1 |

TAPE AND REEL BOX DIMENSIONS



*All dimensions are nominal

| Device | Package Type | Package Drawing | Pins | SPQ | Length (mm) | Width (mm) | Height (mm) |
|-------------------|--------------|-----------------|------|------|-------------|------------|-------------|
| LM2902BAQPWRQ1 | TSSOP | PW | 14 | 3000 | 356.0 | 356.0 | 35.0 |
| LM2902BQPWRQ1 | TSSOP | PW | 14 | 3000 | 356.0 | 356.0 | 35.0 |
| LM2902KAVQPWRG4Q1 | TSSOP | PW | 14 | 2000 | 367.0 | 367.0 | 35.0 |
| LM2902KAVQPWRQ1 | TSSOP | PW | 14 | 2000 | 367.0 | 367.0 | 35.0 |
| LM2902KVQPWRG4Q1 | TSSOP | PW | 14 | 2000 | 367.0 | 367.0 | 35.0 |
| LM2902KVQPWRQ1 | TSSOP | PW | 14 | 2000 | 356.0 | 356.0 | 35.0 |
| LM2902QPWRG4Q1 | TSSOP | PW | 14 | 2000 | 356.0 | 356.0 | 35.0 |
| LM2902QPWRQ1 | TSSOP | PW | 14 | 2000 | 356.0 | 356.0 | 35.0 |

D (R-PDSO-G14)

PLASTIC SMALL OUTLINE



4040047-5/M 06/11

NOTES:

- A. All linear dimensions are in inches (millimeters).
- B. This drawing is subject to change without notice.
- C. Body length does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.006 (0,15) each side.
- D. Body width does not include interlead flash. Interlead flash shall not exceed 0.017 (0,43) each side.
- E. Reference JEDEC MS-012 variation AB.

D (R-PDSO-G14)

PLASTIC SMALL OUTLINE



- NOTES:
- A. All linear dimensions are in millimeters.
 - B. This drawing is subject to change without notice.
 - C. Publication IPC-7351 is recommended for alternate designs.
 - D. Laser cutting apertures with trapezoidal walls and also rounding corners will offer better paste release. Customers should contact their board assembly site for stencil design recommendations. Refer to IPC-7525 for other stencil recommendations.
 - E. Customers should contact their board fabrication site for solder mask tolerances between and around signal pads.

PW (R-PDSO-G14)

PLASTIC SMALL OUTLINE



4040064-3/G 02/11

- NOTES:
- A. All linear dimensions are in millimeters. Dimensioning and tolerancing per ASME Y14.5M-1994.
 - B. This drawing is subject to change without notice.
 - C. Body length does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0,15 each side.
 - D. Body width does not include interlead flash. Interlead flash shall not exceed 0,25 each side.
 - E. Falls within JEDEC MO-153

PW (R-PDSO-G14)

PLASTIC SMALL OUTLINE



- NOTES:
- All linear dimensions are in millimeters.
 - This drawing is subject to change without notice.
 - Publication IPC-7351 is recommended for alternate designs.
 - Laser cutting apertures with trapezoidal walls and also rounding corners will offer better paste release. Customers should contact their board assembly site for stencil design recommendations. Refer to IPC-7525 for other stencil recommendations.
 - Customers should contact their board fabrication site for solder mask tolerances between and around signal pads.

IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATA SHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you will fully indemnify TI and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to [TI's Terms of Sale](#) or other applicable terms available either on [ti.com](#) or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products.

TI objects to and rejects any additional or different terms you may have proposed.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2024, Texas Instruments Incorporated